

SERVOFLEX SFC SA2 - Datasheet

SINGLE ELEMENT TYPE

Specifications


Model	Shape type	Rated torque [N·m]	Misalignment			Max. rotation speed [min ⁻¹]	Torsional stiffness [N·m/rad]	Axial stiffness [N/mm]	Moment of inertia [kg·m ²]	Mass [kg]
			Parallel [mm]	Angular [°]	Axial [mm]					
SFC-002SA2	C	0.25	0.01	0.5	± 0.04	10000	190	34	0.06 × 10 ⁻⁶	0.003
SFC-005SA2	C	0.6	0.02	0.5	± 0.05	10000	500	140	0.26 × 10 ⁻⁶	0.007
SFC-010SA2	C	1	0.02	1	± 0.1	10000	1400	140	0.58 × 10 ⁻⁶	0.011
SFC-020SA2	C	2	0.02	1	± 0.15	10000	3700	64	2.39 × 10 ⁻⁶	0.025
SFC-025SA2	C	4	0.02	1	± 0.19	10000	5600	60	3.67 × 10 ⁻⁶	0.029
SFC-030SA2	A	5	0.02	1	± 0.2	10000	8000	64	4.07 × 10 ⁻⁶	0.034
	B								6.09 × 10 ⁻⁶	0.041
	C								8.20 × 10 ⁻⁶	0.049
SFC-035SA2	C	10	0.02	1	± 0.25	10000	18000	112	18.44 × 10 ⁻⁶	0.082
SFC-040SA2	A	12	0.02	1	± 0.3	10000	20000	80	16.71 × 10 ⁻⁶	0.077
	B								22.55 × 10 ⁻⁶	0.085
	C								29.25 × 10 ⁻⁶	0.100
SFC-050SA2	A	25	0.02	1	± 0.4	10000	32000	48	55.71 × 10 ⁻⁶	0.159
	B								76.26 × 10 ⁻⁶	0.177
	C								99.03 × 10 ⁻⁶	0.206
SFC-055SA2	C	40	0.02	1	± 0.42	10000	50000	43	188.0 × 10 ⁻⁶	0.314
SFC-060SA2	A	60	0.02	1	± 0.45	10000	70000	76.4	145.9 × 10 ⁻⁶	0.283
	B								205.0 × 10 ⁻⁶	0.326
	C								268.6 × 10 ⁻⁶	0.385
SFC-080SA2	C	100	0.02	1	± 0.55	10000	140000	128	710.6 × 10 ⁻⁶	0.708
SFC-090SA2	C	180	0.02	1	± 0.65	10000	100000	108	1236 × 10 ⁻⁶	0.946
SFC-100SA2	C	250	0.02	1	± 0.74	10000	120000	111	1891 × 10 ⁻⁶	1.202

• The rated torque of the coupling may be limited for bore diameters.
• Higher rpm possible with balancing.


• Torsional stiffness values given are measured values for the flexible element alone.
• The moment of inertia and mass are specified for the maximum bore diameter.

Dimensions



■ TYPE A



■ TYPE B



■ TYPE C



Model	Shape type	d1 [mm]		d2 [mm]		D [mm]	DB [mm]	N [mm]	L [mm]	LF [mm]	S [mm]	A1 [mm]	A2 [mm]	C [mm]	K [mm]	M Quantity - Nominal dia.	Tightening torque [N·m]
		Min.	Max.	Min.	Max.												
SFC-002SA2	C	3	5	3	5	12	12.4	—	12.35	5.9	0.55	—	3.7	1.9	5.6	1-M1.6	0.23 ~ 0.28
SFC-005SA2	C	3	6	3	6	16	—	—	16.7	7.85	1	—	4.8	2.5	6.5	1-M2	0.4 ~ 0.5
SFC-010SA2	C	3	8	3	8	19	—	—	19.35	9.15	1.05	—	5.8 (6)	3.15	8.5	1-M2.5 (M2)	1.0 ~ 1.1 (0.4 ~ 0.5)
SFC-020SA2	C	4	10	4	11	26	—	—	23.15	10.75	1.65	—	9.5	3.3	10.6	1-M2.5	1.0 ~ 1.1
SFC-025SA2	C	5	14	5	14	29	—	—	23.4	10.75	1.9	—	11	3.3	14.5	1-M2.5	1.0 ~ 1.1
SFC-030SA2	A	5	10	5	10	34	—	21.6	27.3	12.4	2.5	8	—	3.75	14.5	1-M3	1.5 ~ 1.9
	B	5	10	Over 10	16								12.5				
	C	Over 10	14	Over 10	16								12.5				
SFC-035SA2	C	6	16	6	19	39	—	—	34	15.5	3	—	14	4.5	17	1-M4	3.4 ~ 4.1
SFC-040SA2	A	8	15	8	15	44	—	29.6	34	15.5	3	11	—	4.5	19.5	1-M4	3.4 ~ 4.1
	B	8	15	Over 15	24								17				
	C	Over 15	19	Over 15	24								17				
SFC-050SA2	A	8	19	8	19	56	—	38	43.4	20.5	2.4	14.5	22	6	26	1-M5	7.0 ~ 8.5
	B	8	19	Over 19	30								22				
	C	Over 19	25	Over 19	30								22				
SFC-055SA2	C	10	30	10	30	63	—	—	50.6	24	2.6	—	23	7.75	31	1-M6	14 ~ 15
SFC-060SA2	A	11	24	11	24	68	—	46	53.6	25.2	3.2	17.5	—	7.75	31	1-M6	14 ~ 15
	B	11	24	Over 24	35								26.5				
	C	Over 24	30	Over 24	35								26.5				
SFC-080SA2	C	18	35	18	40	82	—	—	68	30	8	—	28	9	38	1-M8	27 ~ 30
SFC-090SA2	C	25	40	25	45	94	—	—	68.3	30	8.3	—	34	9	42	1-M8	27 ~ 30
SFC-100SA2	C	32	45	32	45	104	—	—	69.8	30	9.8	—	39	9	48	1-M8	27 ~ 30

• φDB = Interference radius of the screw head
• The figures in parentheses () for the SFC-010 are the values when d1 or d2 is ø8 mm.


Standard Bore Diameter

		Standard (option) bore diameter, d1/d2 [mm] and related rated torque [N-m]																																
Nominal bore diameter		3	4	5	6	6.35	7	8	9	9.525	10	11	12	13	14	15	16	17	18	19	20	22	24	25	28	30	32	35	38	40	42	45		
Shaft tolerance	h7 (h6 - g6)	B	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	j6 (Option)	J																		○	○	○	○	○										
	k6 (Option)	K						○	○							○	○			○	○	○					○	○						
Supported bore diameter for each model	SFC-002SA2	d1	●	●	●																													
	d2	●	●	●																														
	SFC-005SA2	d1	●	●	●	●																												
	d2	●	●	●	●																													
	SFC-010SA2	d1	●	●	●	●	●	●																										
	d2	●	●	●	●	●	●	●																										
	SFC-020SA2	d1		●	●	●	●	●	●	●	●	●																						
	d2		●	●	●	●	●	●	●	●	●	●	●																					
	SFC-025SA2	d1			2.1	●	●	●	●	●	●	●	●	●	●	●																		
	d2			2.1	●	●	●	●	●	●	●	●	●	●	●	●	●																	
	SFC-030SA2	d1			2.8	3.4	●	●	●	●	●	●	●	●	●	●	●																	
	d2			2.8	3.4	●	●	●	●	●	●	●	●	●	●	●	●	●	●															
	SFC-035SA2	d1			5	5	6.6	●	●	●	●	●	●	●	●	●	●	●	●	●														
	d2			5	5	6.6	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●												
	SFC-040SA2	d1						9	●	●	●	●	●	●	●	●	●	●	●	●	●	●												
	d2							9	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
	SFC-050SA2	d1						18	20	22	22	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	d2							18	20	22	22	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	SFC-055SA2	d1										31	34	36	38	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	d2											31	34	36	38	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
SFC-060SA2	d1											50	51	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
d2												50	51	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
SFC-080SA2	d1																																	
d2																																		
SFC-090SA2	d1																																	
d2																																		
SFC-100SA2	d1																																	
d2																																		

- The shaft tolerance for standard bore diameter is h7 (h6 or g6): designation B. However, for a bore diameter of ø35, the shaft tolerance is $^{+0.010}_{-0.025}$.
- Shaft tolerances j6/k6: designations J/K are optional, and are only supported for bore diameters marked with ○.
- Bore diameters marked with ● or numbers are supported as the standard bore diameters. Please contact Miki Pulley regarding special arrangements which may be possible for other bore diameters.
- Bore diameters whose fields contain numbers are restricted in their rated torque by the holding power of the shaft connection component because the bore diameter is small. The numbers indicate the rated torque [N-m].

How to Place an Order

SFC-025SA2-10B-14K

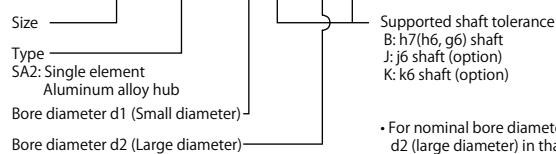


Supported shaft tolerance
 B: h7(h6, g6) shaft
 J: j6 shaft (option)
 K: k6 shaft (option)

- For nominal bore diameter, select d1 (small diameter) – d2 (large diameter) in that order.
- If d1=d2 (same diameters), select B, J, and K in that order.


Options Keyway

Keyway Standards

SFC(SA2)



SFC(DA2)

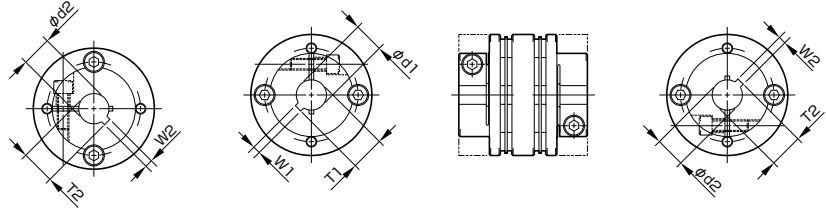

H9 keyway										JS9 keyway																	
Nominal bore dia.	Shaft tolerance			Bore dia. d1 · d2 [mm]	Keyway width W1 · W2 [mm]	Keyway height T1 · T2 [mm]	Nominal bore dia.	Shaft tolerance			Bore dia. d1 · d2 [mm]	Keyway width W1 · W2 [mm]	Keyway height T1 · T2 [mm]	Nominal bore dia.	Shaft tolerance			Bore dia. d1 · d2 [mm]	Keyway width W1 · W2 [mm]	Keyway height T1 · T2 [mm]							
	h7	j6	k6					h7	j6	k6					h7	j6	k6										
8	BH	—	KH	8	3 ^{+0.025} ₀	9.4 ^{+0.3} ₀	20	BH	—	—	20	6 ^{+0.030} ₀	22.8 ^{+0.3} ₀	8	BJ	—	KJ	8	3 ± 0.0125	9.4 ^{+0.3} ₀	20	BJ	—	—	20	6 ± 0.0150	22.8 ^{+0.3} ₀
9	BH	—	KH	9	3 ^{+0.025} ₀	10.4 ^{+0.3} ₀	22	BH	JH	KH	22	6 ^{+0.030} ₀	24.8 ^{+0.3} ₀	9	BJ	—	KJ	9	3 ± 0.0125	10.4 ^{+0.3} ₀	22	BJ	JJ	KJ	22	6 ± 0.0150	24.8 ^{+0.3} ₀
10	BH	—	—	10	3 ^{+0.025} ₀	11.4 ^{+0.3} ₀	24	BH	JH	KH	24	8 ^{+0.036} ₀	27.3 ^{+0.3} ₀	10	BJ	—	—	10	3 ± 0.0125	11.4 ^{+0.3} ₀	24	BJ	JJ	KJ	24	8 ± 0.0180	27.3 ^{+0.3} ₀
11	BH	—	—	11	4 ^{+0.030} ₀	12.8 ^{+0.3} ₀	25	BH	—	—	25	8 ^{+0.036} ₀	28.3 ^{+0.3} ₀	11	BJ	—	—	11	4 ± 0.0150	12.8 ^{+0.3} ₀	25	BJ	—	—	25	8 ± 0.0180	28.3 ^{+0.3} ₀
12	BH	—	—	12	4 ^{+0.030} ₀	13.8 ^{+0.3} ₀	28	BH	JH	—	28	8 ^{+0.036} ₀	31.3 ^{+0.3} ₀	12	BJ	—	—	12	4 ± 0.0150	13.8 ^{+0.3} ₀	28	BJ	JJ	—	28	8 ± 0.0180	31.3 ^{+0.3} ₀
13	BH	—	—	13	5 ^{+0.030} ₀	15.3 ^{+0.3} ₀	30	BH	—	—	30	8 ^{+0.036} ₀	33.3 ^{+0.3} ₀	13	BJ	—	—	13	5 ± 0.0150	15.3 ^{+0.3} ₀	30	BJ	—	—	30	8 ± 0.0180	33.3 ^{+0.3} ₀
14	BH	—	KH	14	5 ^{+0.030} ₀	16.3 ^{+0.3} ₀	32	BH	—	KH	32	10 ^{+0.036} ₀	35.3 ^{+0.3} ₀	14	BJ	—	KJ	14	5 ± 0.0150	16.3 ^{+0.3} ₀	32	BJ	—	KJ	32	10 ± 0.0180	35.3 ^{+0.3} ₀
15	BH	—	—	15	5 ^{+0.030} ₀	17.3 ^{+0.3} ₀	35	BH	—	—	35	10 ^{+0.036} ₀	38.3 ^{+0.3} ₀	15	BJ	—	—	15	5 ± 0.0150	17.3 ^{+0.3} ₀	35	BJ	—	—	35	10 ± 0.0180	38.3 ^{+0.3} ₀
16	BH	—	KH	16	5 ^{+0.030} ₀	18.3 ^{+0.3} ₀	38	BH	—	KH	38	10 ^{+0.036} ₀	41.3 ^{+0.3} ₀	16	BJ	—	KJ	16	5 ± 0.0150	18.3 ^{+0.3} ₀	38	BJ	—	KJ	38	10 ± 0.0180	41.3 ^{+0.3} ₀
17	BH	—	—	17	5 ^{+0.030} ₀	19.3 ^{+0.3} ₀	40	BH	—	—	40	12 ^{+0.043} ₀	43.3 ^{+0.3} ₀	17	BJ	—	—	17	5 ± 0.0150	19.3 ^{+0.3} ₀	40	BJ	—	—	40	12 ± 0.0215	43.3 ^{+0.3} ₀
18	BH	—	—	18	6 ^{+0.030} ₀	20.8 ^{+0.3} ₀	42	BH	—	—	42	12 ^{+0.043} ₀	45.3 ^{+0.3} ₀	18	BJ	—	—	18	6 ± 0.0150	20.8 ^{+0.3} ₀	42	BJ	—	—	42	12 ± 0.0215	45.3 ^{+0.3} ₀
19	BH	JH	KH	19	6 ^{+0.030} ₀	21.8 ^{+0.3} ₀	45	BH	—	—	45	14 ^{+0.043} ₀	48.8 ^{+0.3} ₀	19	BJ	JJ	KJ	19	6 ± 0.0150	21.8 ^{+0.3} ₀	45	BJ	—	—	45	14 ± 0.0215	48.8 ^{+0.3} ₀

* We can also handle standards not listed above. Please contact Miki Pulley.

Standard Bore Diameter

		Standard (option) bore diameter, d1/d2 [mm] and related rated torque [N·m]																							
		8	9	10	11	12	13	14	15	16	17	18	19	20	22	24	25	28	30	32	35	38	40	42	45
Shaft tolerance	h7 (h6 · g6)	B	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	j6 (Option)	J											○		○	○									
	k6 (Option)	K	○	○					○		○			○	○	○				○		○			
Supported bore diameter for each model	SFC-025DA2	d1	●	●	●	●	●	●																	
		d2	●	●	●	●	●	●	●																
	SFC-030DA2	d1	●	●	●	●	●	●	●																
		d2	●	●	●	●	●	●	●	●															
	SFC-035DA2	d1	●	●	●	●	●	●	●	●															
		d2	●	●	●	●	●	●	●	●	●														
	SFC-040DA2	d1	9	●	●	●	●	●	●	●	●														
		d2	9	●	●	●	●	●	●	●	●	●													
	SFC-050DA2	d1	18	20	22	●	●	●	●	●	●	●													
		d2	18	20	22	●	●	●	●	●	●	●	●												
	SFC-055DA2	d1			31	34	36	38	●	●	●	●	●												
		d2			31	34	36	38	●	●	●	●	●	●											
SFC-060DA2	d1				50	51	●	●	●	●	●	●	●												
	d2				50	51	●	●	●	●	●	●	●	●											
SFC-080DA2	d1											●	●	●	●	●	●	●	●	●	●	●	●	●	
	d2											●	●	●	●	●	●	●	●	●	●	●	●	●	
SFC-090DA2	d1																	●	●	●	●	●	●	●	
	d2																	●	●	●	●	●	●	●	
SFC-100DA2	d1																								
	d2																								

* The shaft tolerance for standard bore diameter is h7 (h6 or g6): designation B. However, for a bore diameter of ø35, the shaft tolerance is $\pm 0.010/0.025$.

* Shaft tolerances j6/k6: designations J/K are optional, and are only supported for bore diameters marked with ○.

* Bore diameters marked with ● or numbers are supported as the standard bore diameters. Please contact Miki Pulley regarding special arrangements which may be possible for other bore diameters.

* Bore diameters whose fields contain numbers are restricted in their rated torque by the holding power of the shaft connection component because the bore diameter is small. The numbers indicate the rated torque [N·m].

How to Place an Order

SFC-060SA2-12BH-14KJ

Size

Type

SA2: Single element
DA2: Double element

Bore diameter d1
(Small diameter)

Bore diameter d2
(Large diameter)

Affixing method

KJ: k6 shaft + JS9 keyway

Affixing method

BH: h7 (h6, g6) shaft + H9 keyway

* For nominal bore diameter, select d1 (small diameter) -d2 (large diameter) in that order.

* If d1=d2 (same diameters), select B, J, and K in that order.
B · J · K · BH · BJ · JH · JJ · KH · KJ